

ECO R Light Oil Burner



Principais Caraterísticas

- Silent operation;
- Universal flange;
- Stabilized ventilation with a flow/pressure curve that ensures a pressure reserve, very useful during the start-up stage;
- Uniform air distribution which allows a reduction in excess air in combustion and obtaining high performance;
- Fuel pre-heating;
- Simple maintenance;
- Manual air admission regulation and from the exterior;
- Manual regulation of the combustion head from the exterior which allows tuning even during operation;
- Combustion head with precise shape and construction emitting low levels of CO and NOx protecting the environment;
- Ventilator with large aspiration power, allows use with combustion chambers with high load losses.

Descrição do Produto

Domestic diesel burner with 1 level of flame, with powers of 14,2 to 86,6kW.


Modelos e Preços

Código	Modelo
1101-0242	Light Oil Burner ECO7 RN (Monophasic)
1101-0205	Light Oil Burner ECO5 RN (Monophasic)
1101-0204 *	Light Oil Burner ECO3 R (Monophasic)


*Sob encomenda especial

Dimensões

	A	B	C	D	E	F
ECO 3R	250	215	320	90	160	80
ECO 5R	280	247	342	90	195	80
ECO 7R	280	247	410	140	195	90

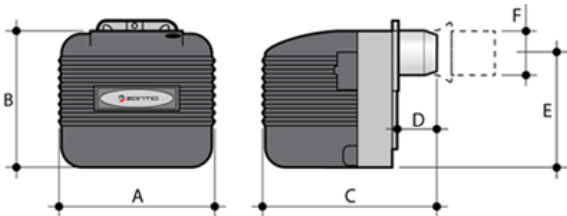

Curva de Potência

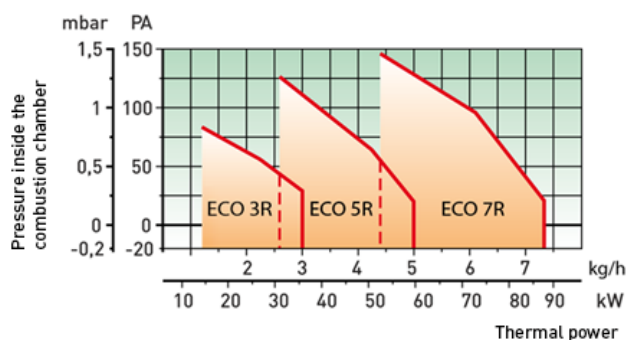

TECHNICAL DATA	ECO 3R	ECO 5RN	ECO 7R
Power (kW) Minimum	14,23	30,80	52,18
Power (kW) Maximum	35,60	59,30	86,60
Consumption (kg/h)	1,2 to 3,0	2,6 to 5,0	4,4 to 7,3
Power supply [V/Hz]	230/50	230/50	230/50

